

# MTL4511 – MTL5511

## SWITCH/ PROXIMITY DETECTOR INTERFACE

### 1-channel, with line fault detection

The MTLx511 enables a safe-area load to be controlled by a switch or proximity detector located in a hazardous-area. When selected, open or short circuit conditions in the field wiring are detected by the line-fault-detect (LFD) facility and also indicated on the top of the module. Phase reversal for the channel is selected by a switch on the side of the module and output is provided by changeover relay contacts.

## SPECIFICATION

See also common specification

### Number of channels

One

### Location of switches

Zone 0, IIC, T6 hazardous area  
Div. 1, Group A hazardous location

### Location of proximity detector

Zone 0, IIC, T4–6 hazardous area if suitably certified  
Div. 1, Group A hazardous location

### Hazardous-area inputs

Inputs conforming to BS EN60947–5–6:2001 standards for proximity detectors (NAMUR)

### Voltage applied to sensor

7 to 9V dc from 1k $\Omega$   $\pm$ 10%

### Input/output characteristics

Normal phase

Outputs closed if input > 2.1mA (< 2k $\Omega$  in input circuit)

Outputs open if input < 1.2mA (> 10k $\Omega$  in input circuit)

Hysteresis: 200 $\mu$ A (650 $\Omega$ ) nominal

### Line fault detection (LFD) (when selected)

User-selectable via switches on the side of the unit. A line fault is indicated by an LED. The channel output relay is de-energised if an input line fault is detected.

Open-circuit alarm on if  $I_{in} < 50\mu$ A

Open-circuit alarm off if  $I_{in} > 250\mu$ A

Short-circuit alarm on if  $R_{in} < 100\Omega$

Short-circuit alarm off if  $R_{in} > 360\Omega$

Note: Resistors must be fitted when using the LFD facility with a contact input  
500 $\Omega$  to 1k $\Omega$  in series with switch  
20k $\Omega$  to 25k $\Omega$  in parallel with switch

### Safe-area output


Single pole relay with changeover contacts

Note: reactive loads must be adequately suppressed


### Relay characteristics

|                             | MTL4511           | MTL5511                                                  |
|-----------------------------|-------------------|----------------------------------------------------------|
| Response time:              | 10ms maximum      | 10ms maximum                                             |
| Contact rating (Safe Area): | 10W, 0.5A, 35V dc | 250V ac, 2A, cos $\phi$ >0.7, 40V dc, 2A, resistive load |
| Contact rating (Zone 2):    | 10W, 0.5A, 35V dc | 35V, 2A, 100VA.                                          |

## MTL4511

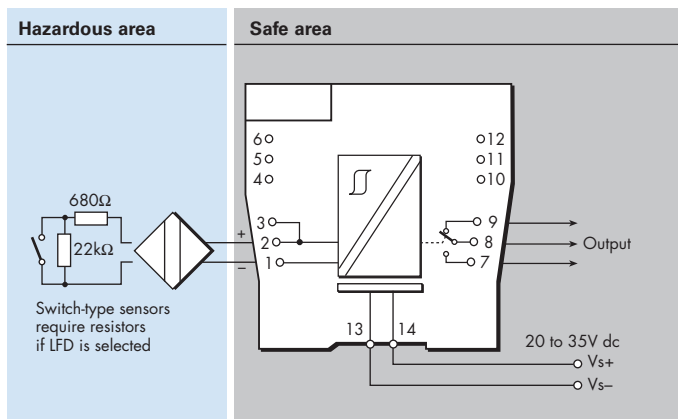

## MTL5511

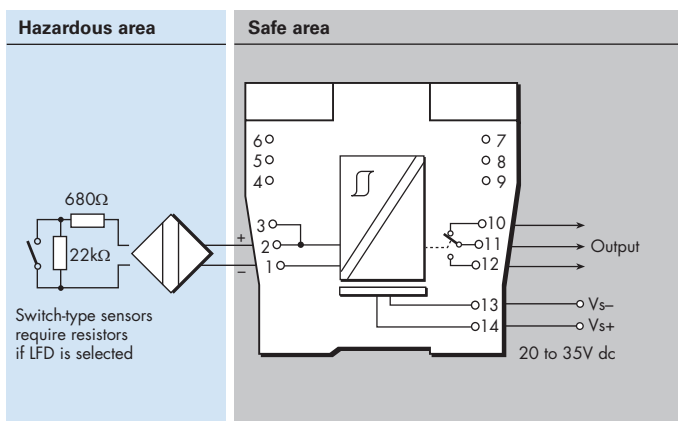

### LED indicators

Green: power indication

Yellow: channel status, on when output energised

Red: LFD indication, on when line fault detected

### Maximum current consumption

25mA at 24V

### Power dissipation within unit

0.6W at 24V

### Safety description (each channel)

$U_o=10.5V$   $I_o=14mA$   $P_o=37mW$   $U_m=253V$  rms or dc



### SIL capable

These models have been assessed for use in IEC 61508 functional safety applications.

SIL2 capable for a single device (HFT=0)

SIL3 capable for multiple devices in safety redundant configurations (HFT=1)

See data on MTL web site and refer to the safety manual.



Powering Business Worldwide

### Eaton Electric Limited,

Great Marlings, Butterfield, Luton  
Beds, LU2 8DL, UK.

Tel: + 44 (0)1582 723633 Fax: + 44 (0)1582 422283

E-mail: [mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)

[www.mtl-inst.com](http://www.mtl-inst.com)

© 2016 Eaton

All Rights Reserved  
Publication No.

EPSx511 Rev6 010916

### EUROPE (EMEA):

+44 (0)1582 723633 [mtlenquiry@eaton.com](mailto:mtlenquiry@eaton.com)

### THE AMERICAS:

+1 800 835 7075 [mtl-us-info@eaton.com](mailto:mtl-us-info@eaton.com)

### ASIA-PACIFIC:

+65 6 645 9888 [sales.mtlsing@eaton.com](mailto:sales.mtlsing@eaton.com)

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee.

In the interest of further technical developments, we reserve the right to make design changes.