



NOTE FOR END USERS REGARDING INSTALLATION OF OIL SPLASH GUARD RETROFIT KIT, P/N AEGCTM-2E-CEGK:  
SOME EARLIER MODELS OF THE CONING & THREADING MACHINE DID NOT HAVE THE 5-18 TAPPED HOLES IN THE STAND FOR MOUNTING THE OIL GUARD ASSEMBLY. THE END USER MUST DRILL (  $\varnothing$  17/64 ) AND TAP TWO ( 5/16-18UNC-2B ) HOLES AT THE LOCATIONS SHOWN IN DETAIL 'C' PRIOR TO INSTALLING OIL GUARD.

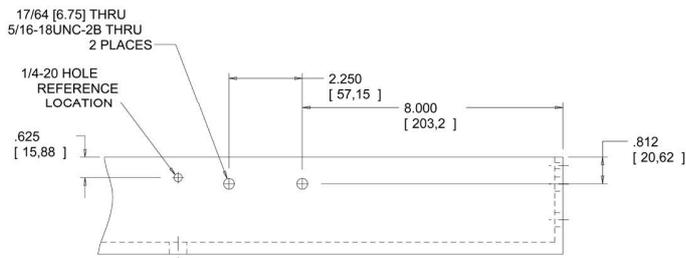

**DETAIL 'A'**  
RETROFIT DETAILS

OIL SPLASH GUARD PARTS LIST: KIT PART NUMBER - AEGCTM-2GK			
Item No.	DESCRIPTION	PART NUMBER	QTY.
1	Oil Guard	90598	1
2	Screw	90596	2
3	Lockwasher, Spring, 1/4, Regular	P-3701	2
4	Bracket, Oil Guard	191F-3394	1
5	Screw	90597	2
6	Lockwasher, Spring, 5/16, Regular	P-0841	2

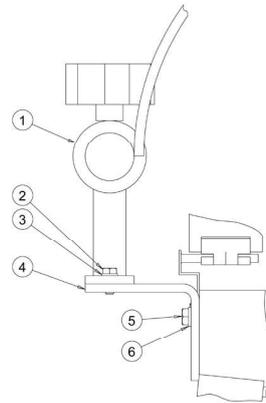

**DETAIL 'B'**  
OIL SPLASH GUARD ASSEMBLY  
MOUNTING DETAILS

